



Solutech bv

INTERNATIONAL TRADING

WESTERSE KWALITEIT MET OOSTERSE PRIJZEN

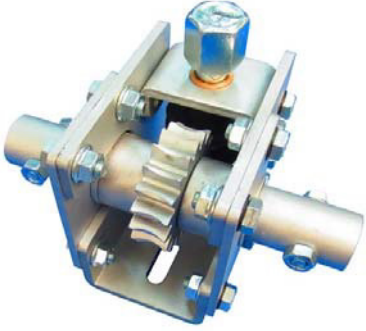




Model	S-600A									
Descriptions	S-600A Hand Winch, 600lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	600 lb	Ratio	3.2 : 1							
Color	Black primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	158x133x103						
			Lift per Crank (mm)	50						
10	/master carton	17.5	Hand Force (Lbs)	10				Rope Storage (m)	Φ3mm	35
280	/pallet	530	Hub Diameter (mm)	Φ16					Φ4mm	17
			Handle Length (mm)	175					Φ5mm	9.5
Mini. Order	1	carton	Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	130
Unit Price	Negotiable		Strap Length (m)	—	Middle Layer Pull (Lbs)	225				
Trade Terms	FOB or CIF		Unit Weight (Kg)	1.7	First Layer Pull (Lbs)	600				
Payment Terms	T/T or L/C									
Model	S-600B									
Descriptions	S-600B Auto-Brake Winch, 600lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	600 lb	Ratio	3.2 : 1							
Color										
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	140x140x103						
			Lift per Crank (mm)	50						
10	/master carton	19	Hand Force (Lbs)	10				Rope Storage (m)	Φ3mm	35
280	/pallet	560	Hub Diameter (mm)	Φ16					Φ4mm	17
			Handle Length (mm)	175					Φ5mm	9.5
Mini. Order	1	carton	Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	130
Unit Price	Negotiable		Strap Length (m)	—	Middle Layer Pull (Lbs)	225				
Trade Terms	FOB or CIF		Unit Weight (Kg)	1.9	First Layer Pull (Lbs)	600				
Payment Terms	T/T or L/C									
Model	S-900A									
Descriptions	S-900A Hand Winch, 900lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	900 lb	Ratio	3.2 : 1							
Color	Black primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	158x133x103						
			Lift per Crank (mm)	50						
10	/master carton	20	Hand Force (Lbs)	14				Rope Storage (m)	Φ3mm	35
280	/pallet	590	Hub Diameter (mm)	Φ19					Φ4mm	17
			Handle Length (mm)	175					Φ5mm	9.5
Mini. Order	1	carton	Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	226
Unit Price	Negotiable		Strap Length (m)	—	Middle Layer Pull (Lbs)	380				
Trade Terms	FOB or CIF		Unit Weight (Kg)	1.83	First Layer Pull (Lbs)	900				
Payment Terms	T/T or L/C									

Model	S-900B						
Descriptions	S-900B Auto-Brake Winch, 900lb. Cable/Strap Optional, Meeting European Standards						
Rated Load	900 lb	Ratio	3.2 : 1				
Color	Black primary, other colors also available						
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)	140x140x103		
				Lift per Crank (mm)	50		
10	/master carton	21	Hand Force (Lbs)	14			
280	/pallet	620	Hub Diameter (mm)	Ø19			
Mini. Order	1 carton	Handle Length (mm)	175				
Unit Price	Negotiable		Strap (WxT) (mm)	—			
Trade Terms	FOB or CIF		Strap Length (m)	—			
Payment Terms	T/T or L/C		Unit Weight (Kg)	2.02			
				Rope Storage (m)	Ø3mm	35	
					Ø4mm	17	
					Ø5mm	9.5	
				Pull (Ø5mm)	Last Layer Pull (Lbs)	226	
					Middle Layer Pull (Lbs)	380	
					First Layer Pull (Lbs)	900	
Model	S-1100A						
Descriptions	S-1100A Hand Winch, 1100lb. Cable/Strap Optional, CE/GS Approved and Certified						
Rated Load	1100 lb	Ratio	3.87 : 1				
Color	Black primary, other colors also available						
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)	160x132x136		
				Lift per Crank (mm)	133		
10	/master carton	26	Hand Force (Lbs)	37			
200	/pallet	550	Hub Diameter (mm)	Ø42.5			
Mini. Order	1 carton	Handle Length (mm)	175				
Unit Price	Negotiable		Strap (WxT) (mm)	—			
Trade Terms	FOB or CIF		Strap Length (m)	—			
Payment Terms	T/T or L/C		Unit Weight (Kg)	2.35			
				Rope Storage (m)	Ø3mm	56	
					Ø4mm	26	
					Ø5mm	15	
				Pull (Ø5mm)	Last Layer Pull (Lbs)	469	
					Middle Layer Pull (Lbs)	678	
					First Layer Pull (Lbs)	1100	
Model	SB-1100S						
Descriptions	SB-1100S Hand Winch, 1100lb. Cable/Strap Optional, CE/GS Approved and Certified						
Rated Load	1100 lb	Ratio	3.87 : 1				
Color	Black primary, other colors also available						
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)	160x148x136		
				Lift per Crank (mm)	133		
10	/master carton	27	Hand Force (Lbs)	37			
200	/pallet	570	Hub Diameter (mm)	Ø42.5			
Mini. Order	1 carton	Handle Length (mm)	175				
Unit Price	Negotiable		Strap (WxT) (mm)	—			
Trade Terms	FOB or CIF		Strap Length (m)	—			
Payment Terms	T/T or L/C		Unit Weight (Kg)	2.55			
				Rope Storage (m)	Ø3mm	56	
					Ø4mm	26	
					Ø5mm	15	
				Pull (Ø5mm)	Last Layer Pull (Lbs)	469	
					Middle Layer Pull (Lbs)	678	
					First Layer Pull (Lbs)	1100	

Model	S-1200A						
Descriptions	S-1200A Hand Winch, 1200lb. Cable/Strap Optional, Meeting European Standards						
Rated Load	1200 lb	Ratio	4.1 : 1				
Color	Black primary, other colors also available						
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)	205x125x148		
				Lift per Crank (mm)	104		
8	/master carton	22	Hand Force (Lbs)	30			
160	/pallet	470	Hub Diameter (mm)	Φ33			
Mini. Order		1 carton	Handle Length (mm)	175			
Unit Price		Negotiable	Strap (WxT) (mm)	—			
Trade Terms		FOB or CIF	Strap Length (m)	—			
Payment Terms		T/T or L/C	Unit Weight (Kg)	2.6			
			Rope Storage (m)	Φ3mm	59		
				Φ4mm	32		
				Φ5mm	17		
			Pull (Φ5mm)	Last Layer Pull (Lbs)	359		
				Middle Layer Pull (Lbs)	570		
				First Layer Pull (Lbs)	1200		
Model	S-1200B						
Descriptions	S-1200B Auto-Brake Winch, 1200lb. Cable/Strap Optional, CE/GS Approved and Certified						
Rated Load	1200 lb	Ratio	4.1 : 1				
Color	Grey or Blue primary, other colors also available						
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)	185x157x155		
				Lift per Crank (mm)	104		
6	/master carton	23	Hand Force (Lbs)	15.8			
120	/pallet	490	Hub Diameter (mm)	Φ33			
Mini. Order		1 carton	Handle Length (mm)	210			
Unit Price		Negotiable	Strap (WxT) (mm)	—			
Trade Terms		FOB or CIF	Strap Length (m)	—			
Payment Terms		T/T or L/C	Unit Weight (Kg)	3.5			
			Rope Storage (m)	Φ3mm	59		
				Φ4mm	32		
				Φ5mm	17		
			Pull (Φ5mm)	Last Layer Pull (Lbs)	359		
				Middle Layer Pull (Lbs)	570		
				First Layer Pull (Lbs)	1200		
Model	S-1200B with Cover						
Descriptions	S-1200B Auto-Brake Winch, 1200lb. Cable/Strap Optional, CE/GS Approved and Certified						
Rated Load	1200 lb	Ratio	4.1 : 1				
Color	Grey or Blue primary, other colors also available						
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)	185x157x155		
				Lift per Crank (mm)	104		
6	/master carton	23	Hand Force (Lbs)	15.8			
120	/pallet	490	Hub Diameter (mm)	Φ33			
Mini. Order		1 carton	Handle Length (mm)	210			
Unit Price		Negotiable	Strap (WxT) (mm)	—			
Trade Terms		FOB or CIF	Strap Length (m)	—			
Payment Terms		T/T or L/C	Unit Weight (Kg)	3.5			
			Rope Storage (m)	Φ3mm	59		
				Φ4mm	32		
				Φ5mm	17		
			Pull (Φ5mm)	Last Layer Pull (Lbs)	359		
				Middle Layer Pull (Lbs)	570		
				First Layer Pull (Lbs)	1200		

Model	S-12BFG									
Descriptions	S-12BFG Auto-Brake Winch, 1200lb. Cable/Strap Optional, CE/GS Approved and Certified									
Rated Load	1200 lb	Ratio	4.1 : 1							
Color	Grey primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	190x158x162						
			Lift per Crank (mm)	173						
6	/master carton	22	Hand Force (Lbs)	23				Rope Storage (m)	Φ3mm	54
120	/pallet	470	Hub Diameter (mm)	Φ55					Φ4mm	25
			Handle Length (mm)	210					Φ5mm	13.5
Mini. Order	1	carton	Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	356
Unit Price	Negotiable		Strap Length (m)	—	Middle Layer Pull (Lbs)	446				
Trade Terms	FOB or CIF		Unit Weight (Kg)	3.65	First Layer Pull (Lbs)	660				
Payment Terms	T/T or L/C									
Model	S-12BEXT									
Descriptions	S-12BEXT Auto-Brake Dual-handle Winch, 1200lb. Cable/Strap Optional, CE/GS Approved and Certified									
Rated Load	1200 lb	Ratio	4.1 : 1							
Color	Blue primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	183x178x155						
			Lift per Crank (mm)	104						
6	/master carton	9	Hand Force (Lbs)	—				Rope Storage (m)	Φ3mm	59
120	/pallet	210	Hub Diameter (mm)	Φ33					Φ4mm	32
			Handle Length (mm)	—					Φ5mm	17
Mini. Order	1	carton	Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	359
Unit Price	Negotiable		Strap Length (m)	—	Middle Layer Pull (Lbs)	570				
Trade Terms	FOB or CIF		Unit Weight (Kg)	2.95	First Layer Pull (Lbs)	1200				
Payment Terms	T/T or L/C									
Model	S-12WG									
Descriptions	S-12WG Worm Gear Winch, 1200lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	1200 lb	Ratio	28 : 1							
Color	Grey or Blue primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	140x149x180						
			Lift per Crank (mm)	75						
2	/master carton	6.5	Hand Force (Lbs)	—				Rope Storage (m)	Φ3mm	32
90	/pallet	585	Hub Diameter (mm)	Φ24					Φ4mm	19
			Handle Length (mm)	—					Φ5mm	11
Mini. Order	1	carton	Strap (WxT) (mm)	50x3				Pull (Φ5mm)	Last Layer Pull (Lbs)	370
Unit Price	Negotiable		Strap Length (m)	2	Middle Layer Pull (Lbs)	590				
Trade Terms	FOB or CIF		Unit Weight (Kg)	3.2	First Layer Pull (Lbs)	1200				
Payment Terms	T/T or L/C									

Model	SQ-10SPQ								
Descriptions	SQ-10SPQ Hex-Drive Worm-Gear winch, Meeting European Standards								
Rated Load	1000lb	Ratio	18 : 1						
Color	Dacromet Silver-color, other finishes optional								
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)				170x105x138	
				Lift per Crank (mm)				88	
2	/master carton	6.1	Hand Force (Lbs)	13					
105	/pallet	641	Hub Diameter (mm)	Φ28					
Mini. Order		1 carton	Handle Length (mm)	206					
Unit Price		Negotiable		Strap (WxT) (mm)				—	
Trade Terms		FOB or CIF		Strap Length (m)				—	
Payment Terms		T/T or L/C		Unit Weight (Kg)				3	
				Rope Storage (m)				Φ3mm	—
					Φ4mm	—			
					Φ5mm	—			
				Pull (Φ5mm)	Last Layer Pull (Lbs)	—			
					Middle Layer Pull (Lbs)	—			
					First Layer Pull (Lbs)	1000			
Model	S-1400A								
Descriptions	S-1400A Hand Winch, 1400lb. Cable/Strap Optional, Meeting European Standards								
Rated Load	1400 lb	Ratio	4.1 : 1						
Color	Black primary, other colors also available								
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)				202x132x152	
				Lift per Crank (mm)				133	
8	/master carton	26	Hand Force (Lbs)	206					
160	/pallet	550	Hub Diameter (mm)	Φ42.5					
Mini. Order		1 carton	Handle Length (mm)	175					
Unit Price		Negotiable		Strap (WxT) (mm)				—	
Trade Terms		FOB or CIF		Strap Length (m)				—	
Payment Terms		T/T or L/C		Unit Weight (Kg)				3.14	
				Rope Storage (m)				Φ3mm	57
					Φ4mm	29			
					Φ5mm	17			
				Pull (Φ5mm)	Last Layer Pull (Lbs)	537			
					Middle Layer Pull (Lbs)	763			
					First Layer Pull (Lbs)	1400			
Model	S-1500								
Descriptions	S-1500 Worm-Gear Winch, 1500lb. Cable/Strap Optional, Single or Split CE/GS Approved and Certified,								
Rated Load	1500 lb	Ratio	41 : 1						
Color	Black or Blue, other colors also available								
STD Packing (unit)		Shipping Weight (kg)		Dimension (LxWxH) (mm)				185x149x188	
				Lift per Crank (mm)				150	
2	/master carton	12	Hand Force (Lbs)	—					
150	/pallet	930	Hub Diameter (mm)	Φ48					
Mini. Order		1 carton	Handle Length (mm)	—					
Unit Price		Negotiable		Strap (WxT) (mm)				—	
Trade Terms		FOB or CIF		Strap Length (m)				—	
Payment Terms		T/T or L/C		Unit Weight (Kg)				5.1	
				Rope Storage (m)				Φ3mm	—
					Φ4mm	—			
					Φ5mm	11			
				Pull (Φ5mm)	Last Layer Pull (Lbs)	757			
					Middle Layer Pull (Lbs)	964			
					First Layer Pull (Lbs)	1500			

Model	S-15B								
Descriptions	S-15B Auto-Brake Winch, 1500lb. Cable/Strap Optional, Meeting European Standards								
Rated Load	1500 lb	Ratio	4.1 : 1						
Color	Black primary, other colors also available								
STD Packing (unit)	Shipping Weight (kg)	Dimension (LxWxH) (mm)	199x182x163						
		Lift per Crank (mm)	180						
	/master carton	Hand Force (Lbs)	210				Rope Storage (m)	Φ3mm	74
	/pallet	Hub Diameter (mm)	Φ57					Φ4mm	36
Mini. Order	1 carton	Handle Length (mm)	244					Φ5mm	27
Unit Price	Negotiable	Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	185
Trade Terms	FOB or CIF	Strap Length (m)	—	Middle Layer Pull (Lbs)	277				
Payment Terms	T/T or L/C	Unit Weight (Kg)		First Layer Pull (Lbs)	1500				
Model	S-1500HDV								
Descriptions	S-1500HDV Worm-Gear Winch, 1500lb. Cable/Strap Optional, Single or Split CE/GS Approved and Certified,								
Rated Load	1500 lb	Ratio	41 : 1						
Color	Black or Blue, other colors also available								
STD Packing (unit)	Shipping Weight (kg)	Dimension (LxWxH) (mm)							
		Lift per Crank (mm)							
	/master carton	Hand Force (Lbs)					Rope Storage (m)	Φ3mm	
	/pallet	Hub Diameter (mm)						Φ4mm	
Mini. Order	1 carton	Handle Length (mm)						Φ5mm	
Unit Price	Negotiable	Strap (WxT) (mm)					Pull (Φ5mm)	Last Layer Pull (Lbs)	
Trade Terms	FOB or CIF	Strap Length (m)		Middle Layer Pull (Lbs)					
Payment Terms	T/T or L/C	Unit Weight (Kg)		First Layer Pull (Lbs)					




Model	S-15PIPE						
Descriptions	S-15PIPE Loop-Drive Worm-Gear winch, Meeting European Standards						
Rated Load	lb	Ratio	41 : 1				
Color	Dacromet Silver-color, other finishes optional						
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	250x170x190			
2	/master carton	11	Lift per Crank (mm)				
110	/pallet	630	Hand Force (Lbs)				
Mini. Order	1	carton	Hub Diameter (mm)				
Unit Price	Negotiable		Handle Length (mm)				
Trade Terms	FOB or CIF		Strap (WxT) (mm)				
Payment Terms	T/T or L/C		Strap Length (m)				
			Unit Weight (Kg)				
Model	S-15SPT						
Descriptions	S-15SPT Hex-Drive Worm-Gear winch, Meeting European Standards						
Rated Load	lb	Ratio	28 : 1				
Color	Dacromet Silver-color, other finishes optional						
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	250x125x135			
2	/master carton	8	Lift per Crank (mm)				
150	/pallet	630	Hand Force (Lbs)				
Mini. Order	1	carton	Hub Diameter (mm)				
Unit Price	Negotiable		Handle Length (mm)				
Trade Terms	FOB or CIF		Strap (WxT) (mm)				
Payment Terms	T/T or L/C		Strap Length (m)				
			Unit Weight (Kg)	3.84			
Model	S-1800A						
Descriptions	S-1800A Hand Winch, 1800lb. Cable/Strap Optional, Meeting European Standards						
Rated Load	1800 lb	Ratio	9.43 : 1				
Color	Blue or Black, other colors also available						
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	234x165x187			
2	/master carton	14	Lift per Crank (mm)	173			
110	/pallet	800	Hand Force (Lbs)	24			
Mini. Order	1	carton	Hub Diameter (mm)	Ø55			
Unit Price	Negotiable		Handle Length (mm)	244			
Trade Terms	FOB or CIF		Strap (WxT) (mm)	—			
Payment Terms	T/T or L/C		Strap Length (m)	—			
			Unit Weight (Kg)	6.1			
			Unit Weight (Kg)	6.1			






Rope Storage (m)	Ø3mm	
	Ø4mm	
	Ø5mm	
Pull (Ø5mm)	Last Layer Pull (Lbs)	
	Middle Layer Pull (Lbs)	
	First Layer Pull (Lbs)	

Rope Storage (m)	Ø3mm	
	Ø4mm	
	Ø5mm	
Pull (Ø5mm)	Last Layer Pull (Lbs)	
	Middle Layer Pull (Lbs)	
	First Layer Pull (Lbs)	

Rope Storage (m)	Ø3mm	—
	Ø4mm	—
	Ø5mm	22
Pull (Ø5mm)	Last Layer Pull (Lbs)	807
	Middle Layer Pull (Lbs)	1210
	First Layer Pull (Lbs)	1800

Model	S-1800B									
Descriptions	S-1800B Auto-Brake Winch, 1800lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	1800 lb	Ratio	9.43 : 1							
Color	Blue primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	234x189x187						
			Lift per Crank (mm)	173						
2	/master carton	14	Hand Force (Lbs)	29				Rope Storage (m)	Φ3mm	—
110	/pallet	800	Hub Diameter (mm)	Φ55					Φ4mm	—
Mini. Order		1 carton	Handle Length (mm)	210					Φ5mm	22
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	807
Trade Terms	FOB or CIF		Strap Length (m)	—					Middle Layer Pull (Lbs)	1210
Payment Terms	T/T or L/C		Unit Weight (Kg)	6.1					First Layer Pull (Lbs)	1800
Model	S-18BSSA									
Descriptions	S-18BSSA Auto-Brake Winch, 1800lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	1800 lb	Ratio	9.43 : 1							
Color	Blue primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	234x220x187						
			Lift per Crank (mm)	173						
2	/master carton	15	Hand Force (Lbs)	29	Rope Storage (m)	Φ3mm	—			
110	/pallet	850	Hub Diameter (mm)	Φ55		Φ4mm	—			
Mini. Order		1 carton	Handle Length (mm)	210		Φ5mm	22			
Unit Price	Negotiable		Strap (WxT) (mm)	—	Pull (Φ5mm)	Last Layer Pull (Lbs)	807			
Trade Terms	FOB or CIF		Strap Length (m)	—		Middle Layer Pull (Lbs)	1210			
Payment Terms	T/T or L/C		Unit Weight (Kg)	6.8		First Layer Pull (Lbs)	1800			
Model	S-2000									
Descriptions	S-2000 Worm Gear Winch, 2000lb. Cable/Strap Optional, Single or Split CE/GS Approved and Certified									
Rated Load	2000 lb	Ratio	41 : 1							
Color	Black or Blue, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	185x149x188						
			Lift per Crank (mm)	133						
2	/master carton	11	Hand Force (Lbs)	—				Rope Storage (m)	Φ3mm	—
120	/pallet	690	Hub Diameter (mm)	Φ42.5					Φ4mm	—
Mini. Order		1 carton	Handle Length (mm)	—					Φ5mm	11
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	950
Trade Terms	FOB or CIF		Strap Length (m)	—					Middle Layer Pull (Lbs)	1232
Payment Terms	T/T or L/C		Unit Weight (Kg)	5					First Layer Pull (Lbs)	2000

Model	S-2000 with cover									
Descriptions	S-2000 Worm Gear Winch, 2000lb. Cable/Strap Optional, Single or Split CE/GS Approved and Certified									
Rated Load	2000 lb	Ratio	41 : 1							
Color	Black or Blue, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	185x149x188						
			Lift per Crank (mm)	133						
2	/master carton	11	Hand Force (Lbs)	—				Rope Storage (m)	Φ3mm	—
120	/pallet	690	Hub Diameter (mm)	Φ42.5					Φ4mm	—
Mini. Order		1 carton	Handle Length (mm)	—					Φ5mm	11
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	950
Trade Terms	FOB or CIF		Strap Length (m)	—	Middle Layer Pull (Lbs)	1232				
Payment Terms	T/T or L/C		Unit Weight (Kg)	5	First Layer Pull (Lbs)	2000				
Model	S-2000KT									
Descriptions	S-2000KT Worm Gear Winch, 2000lb. Cable/Strap Optional, Single or Split CE/GS Approved and Certified									
Rated Load	2000 lb	Ratio	41 : 1							
Color	Black or Blue, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	188x187x188						
			Lift per Crank (mm)	133						
2	/master carton	12	Hand Force (Lbs)	—				Rope Storage (m)	Φ3mm	—
150	/pallet	900	Hub Diameter (mm)	Φ42.5					Φ4mm	—
Mini. Order		1 carton	Handle Length (mm)	—					Φ5mm	12
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	950
Trade Terms	FOB or CIF		Strap Length (m)	—	Middle Layer Pull (Lbs)	1232				
Payment Terms	T/T or L/C		Unit Weight (Kg)	5.6	First Layer Pull (Lbs)	2000				
Model	S-2500A									
Descriptions	S-2500A Hand Winch, 2500lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	2500 lb	Ratio	13.12 : 1							
Color	Black primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	240x180x198						
			Lift per Crank (mm)	96						
2	/master carton	15	Hand Force (Lbs)	13				Rope Storage (m)	Φ3mm	—
88	/pallet	690	Hub Diameter (mm)	Φ30.6					Φ4mm	—
Mini. Order		1 carton	Handle Length (mm)	244					Φ5mm	30
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	376
Trade Terms	FOB or CIF		Strap Length (m)	—	Middle Layer Pull (Lbs)	990				
Payment Terms	T/T or L/C		Unit Weight (Kg)	6.6	First Layer Pull (Lbs)	2500				

Model	S-2500B									
Descriptions	S-2500B Auto-Brake Winch, 2500lb Cable/Strap Optional, Meeting European Standards									
Rated Load	2500 lb	Ratio	13.12 : 1							
Color	Black primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	240x200x198						
			Lift per Crank (mm)	96						
2	/master carton	15	Hand Force (Lbs)	13				Rope Storage (m)	Φ3mm	—
88	/pallet	690	Hub Diameter (mm)	Φ30.6					Φ4mm	—
Mini. Order	1	carton	Handle Length (mm)	244					Φ5mm	30
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	596
Trade Terms	FOB or CIF		Strap Length (m)	—	Middle Layer Pull (Lbs)	990				
Payment Terms	T/T or L/C		Unit Weight (Kg)	7	First Layer Pull (Lbs)	2500				
Model	S-3200A									
Descriptions	S-3200A Hand Winch, 3200lb. Cable/Strap Optional, Meeting European Standards									
Rated Load	3200 lb	Ratio	11.89 : 1							
Color	Black primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	240x180x198						
			Lift per Crank (mm)	96						
2	/master carton	15	Hand Force (Lbs)	20				Rope Storage (m)	Φ3mm	—
	/pallet		Hub Diameter (mm)	Φ30.6					Φ4mm	—
Mini. Order	1	carton	Handle Length (mm)	244					Φ5mm	30
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	780
Trade Terms	FOB or CIF		Strap Length (m)	—	Middle Layer Pull (Lbs)	1293				
Payment Terms	T/T or L/C		Unit Weight (Kg)	6.6	First Layer Pull (Lbs)	3200				
Model	S-3200B									
Descriptions	S-3200B Auto-Brake Winch, 3200lb Cable/Strap Optional, Meeting European Standards									
Rated Load	3200 lb	Ratio	11.89 : 1							
Color	Black primary, other colors also available									
STD Packing (unit)	Shipping Weight (kg)		Dimension (LxWxH) (mm)	240x180x198						
			Lift per Crank (mm)	96						
2	/master carton	15	Hand Force (Lbs)	20				Rope Storage (m)	Φ3mm	—
	/pallet		Hub Diameter (mm)	Φ30.6					Φ4mm	—
Mini. Order	1	carton	Handle Length (mm)	244					Φ5mm	30
Unit Price	Negotiable		Strap (WxT) (mm)	—				Pull (Φ5mm)	Last Layer Pull (Lbs)	780
Trade Terms	FOB or CIF		Strap Length (m)	—	Middle Layer Pull (Lbs)	1293				
Payment Terms	T/T or L/C		Unit Weight (Kg)	6.6	First Layer Pull (Lbs)	3200				